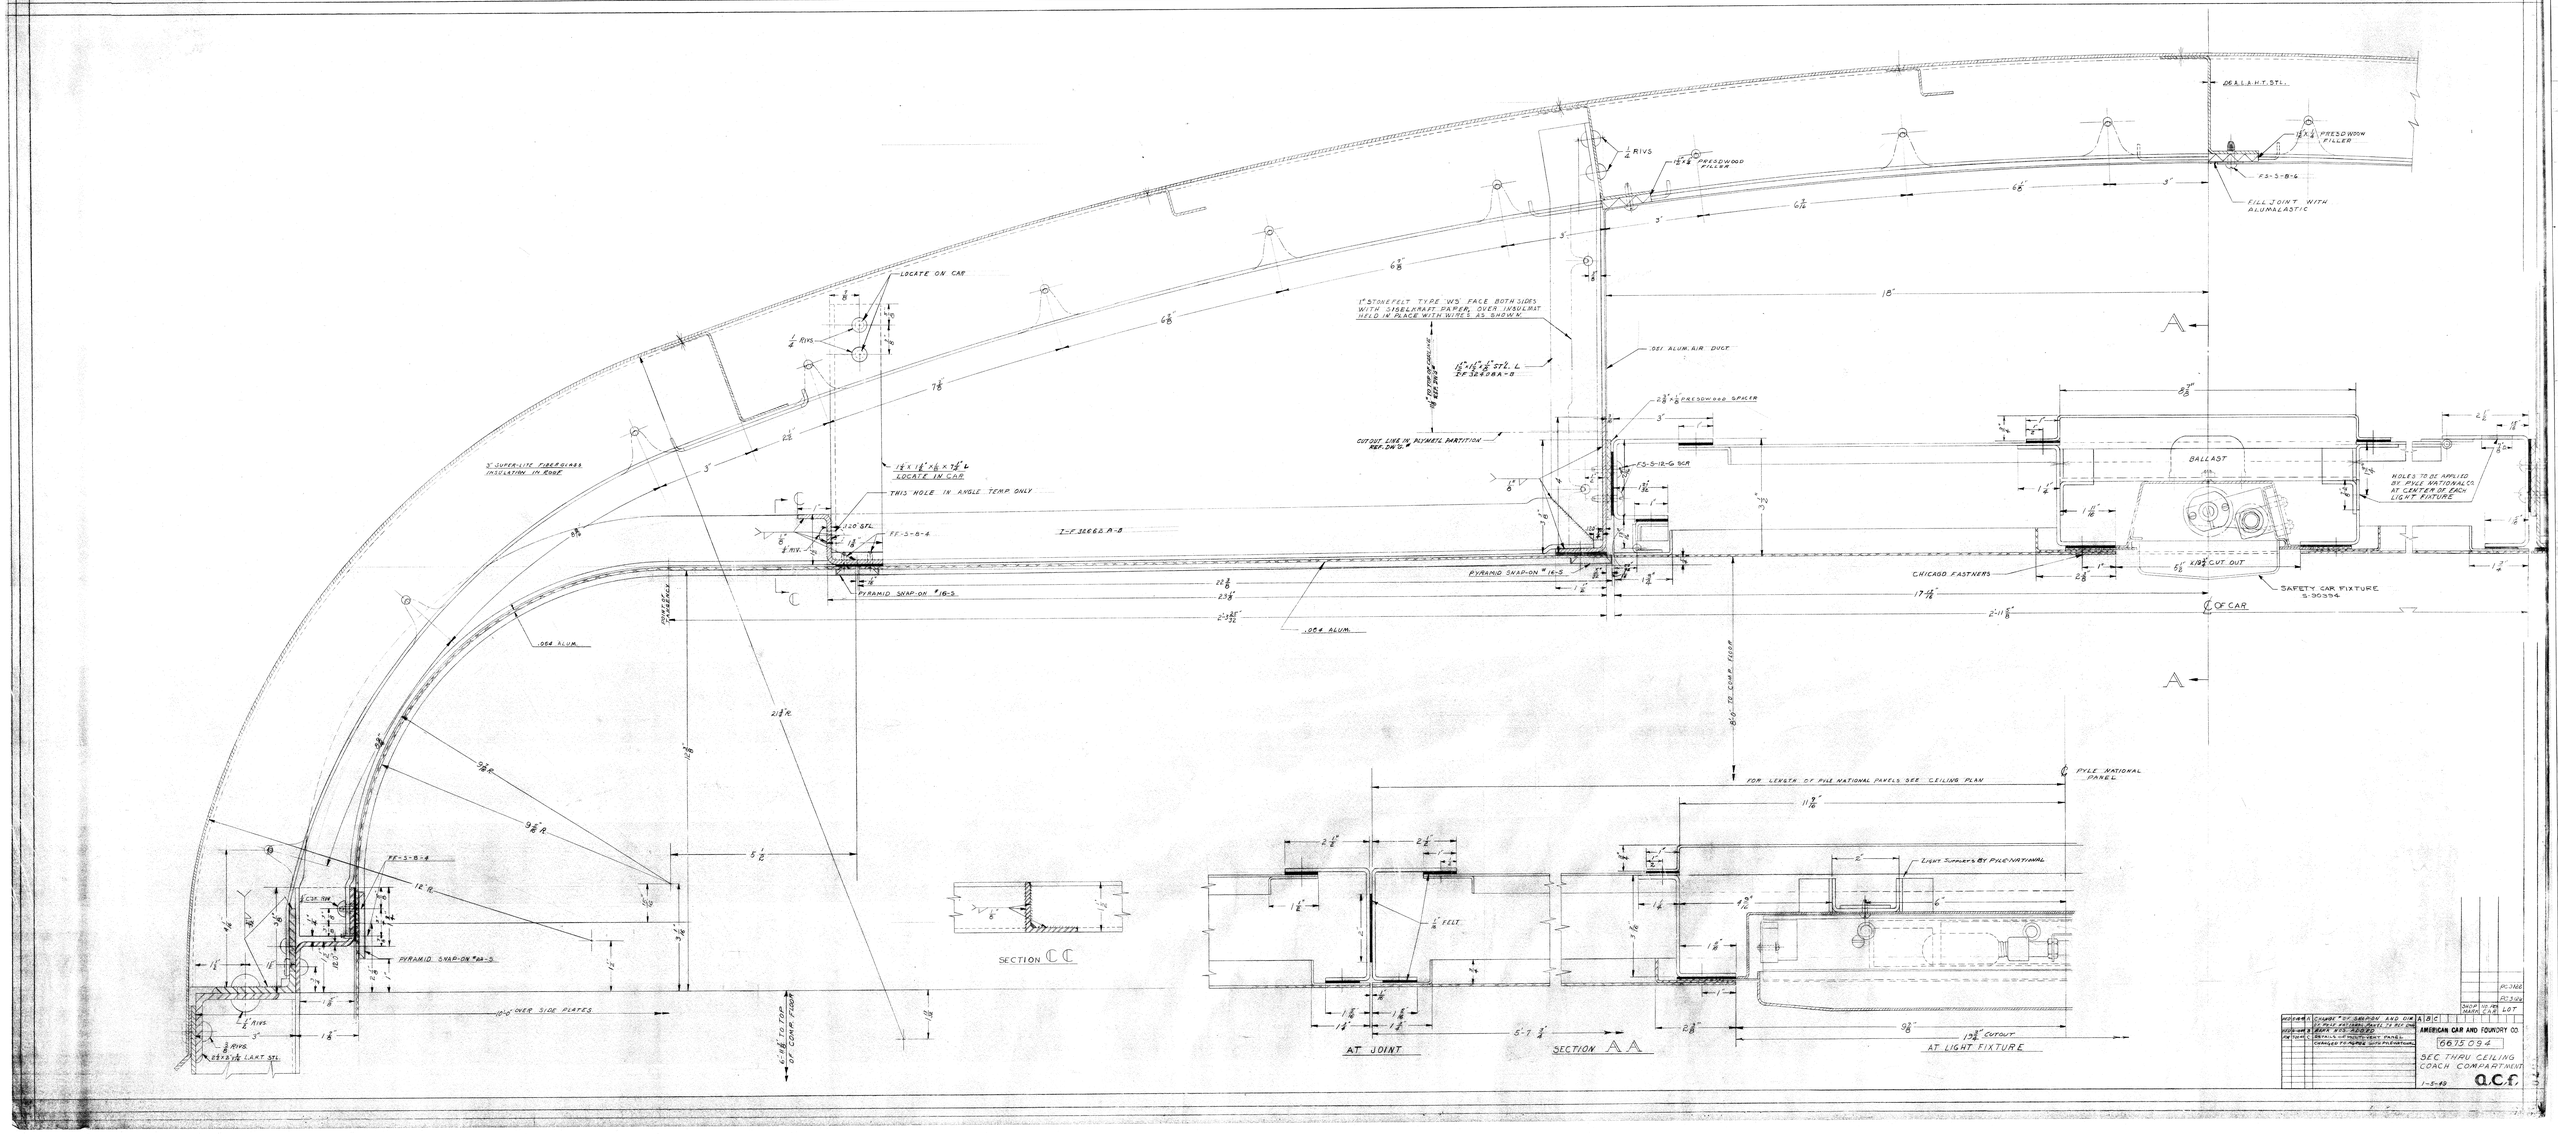
LOCATE ON CAR
1/4 RIVS
3" SUPER-LITE FIBERGLASS INSULATION IN ROOF
1 1/2 X 1 1/2 X 3/16 X 7 1/2" L LOCATE IN CAR
THIS HOLE IN ANGLE TEMP ONLY
120° STL.
FF-3-B-4
1-F 32662 A-B
PYRAMID SNAP-ON #16-S
.064 ALUM.
23 1/2" R.
9 7/8" R.
9 5/8" R.
12" R.
PYRAMID SNAP-ON #8A-S
10'-0" OVER SIDE PLATES
3/8 RIVS
2 1/2 X 2 1/2 X 1/4 L ART STL.
6'-7 1/2" TO TOP OF CONC. FLOOR
SECTION CC
1" STONEFELT TYPE WS FACE BOTH SIDES WITH SISELKRAFT PAPER, OVER INSULMAT HELD IN PLACE WITH WIRES AS SHOWN
1 1/2 X 1 1/2 X 3/16 X 27 1/2" L REF 32428A-B
CUT OUT LINE IN PLYMETL PARTITION REF. DW 16
.051 ALUM. AIR DUCT
2 1/2" X 1/8" PRESSWOOD SPACER
FS-5-12-G SCR
PRESSWOOD FILLER
1/4 RIVS
2 1/2" X 1/8" PRESSWOOD FILLER
FS-3-B-6
FILL JOINT WITH ALUMALASTIC
2 1/2 X 1/4 L ART. STL.
BALLAST
HOLES TO BE APPLIED BY PYLE NATIONAL CO. AT CENTER OF EACH LIGHT FIXTURE
CHICAGO FASTNERS
2 1/2" X 1 1/2" CUT OUT
SAFETY CAR FIXTURE S-30334
℄ OF CAR
8'-0" TO CONC. FLOOR
FOR LENGTH OF PYLE NATIONAL PANELS SEE CEILING PLAN
PYLE NATIONAL PANEL
1/8" FELT
LIGHT SUPPORTS BY PYLE-NATIONAL
AT JOINT
SECTION AA
AT LIGHT FIXTURE
AMERICAN CAR AND FOUNDRY CO.
6675094
SEC THRU CEILING COACH COMPARTMENT
1-2-49
a.c.f.